

Whatsapp: +31 6 838 621 62
info@elektromotor.nl

Model No. 2-Pole cage motor MAP 132S 5,5kW D400V 50Hz IM3641-FT165

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	5,5	7 1/3	10	2943	17,8	IE3	88,1	0,90	7,50	3,40	4,60
690	Y				5,81								

Motor type	MAP132S2A
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Aluminum
Frame size	132S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	5,5 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B (80K)
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6208-2Z/C3

Type of grease	0
----------------	---

Phase resistance at 20°C	1,2100 Ohm
Country of origin	TR


Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	340%	756%		460%	3,28 A

NOTE
All performance values at rated voltage and frequency.
All performance parameters are subjected to standard tolerance as per IEC 60034-1
Voltage, Frequency are as per IEC60034-1
Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3641-FT165
Cooling method	IC411
Motor weight - approx.	49 kg
Gross weight - approx.	50 kg
Motor inertia	0,0130 kgm²
Vibration level	according IEC60034-14
Direction of rotation	cw /ccw
	PTC 150°C

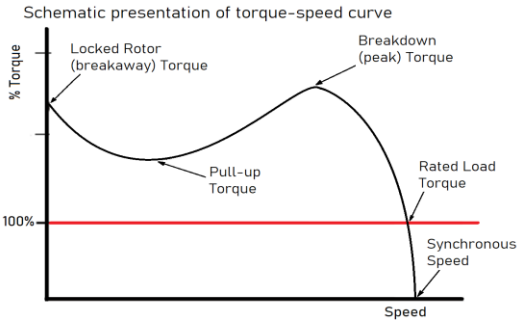

P000051441